


Geometry

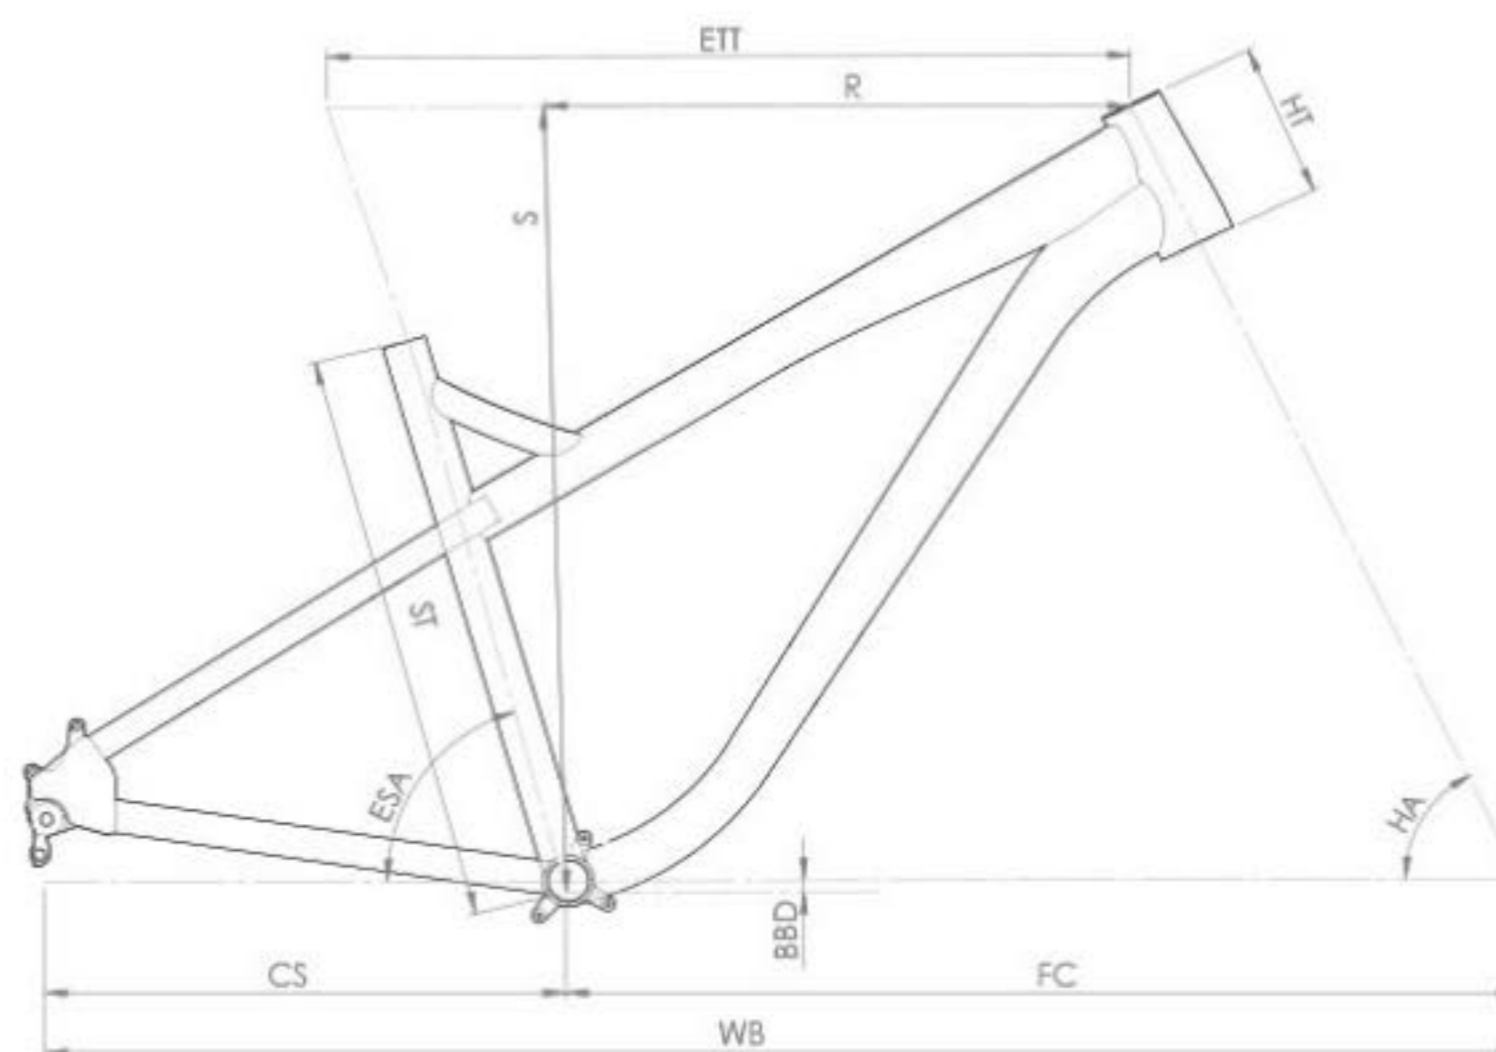

AKA 27.5

AKA 27.5

AKA 29

	Small		Medium		Large	
	Static	25% Sag	Static	25% Sag	Static	25% Sag
Stack (S)	610	598	620	608	630	617
Reach (R)	430	447	450	467	470	486
Effective Top Tube (ETT)	617	612	640	635	657	652
Head Tube Length (HT)	111	111	122	122	133	133
Seat Tube Length (ST)	415	415	450	450	470	470
Bottom Bracket Drop (BBD)	49	49	49	60	60	60
Chain Stay Length (CS)	420-435	420-435	420-435	420-435	420-435	420-435
Wheelbase (WB)	1166-1181	1151-1166	1190-1205	1176-1191	1215-1230	1201-1216
Front Centre (FC)	749	735	773	760	798	785
Head Tube Angle (HA)	64.5°	66°	64.5°	66°	64.5°	66°
Effective Seat Tube Angle (ESA)	73°	74.5°	73°	74.5°	73.5°	75°